

SCG CERAMIC ROOF TILE

EXCELLA

CLASSIC
SERIES

GRACE
SERIES

MODERN
SERIES

“The majestic elegance of authentic ceramic roof tile”

SCG CERAMIC ROOF TILE EXCELLA SERIES

Majestic with the exclusive properties of pure ceramic offering a smooth texture and everlasting vivid color.

Combines innovative manufacturing process and attention to detail in every step.



Longer vivid, more durable

The tiles are heated to a constant 1,000°C in order to acquire a pure ceramic roof tile with lasting vivid and lively color.



No chance of accumulating dust

The tiles are made by “Dry press fast firing process” with high-pressure hydraulic machine to allow perfect adhesion in every molecule. This produces tiles with no porosity, smooth surface, and reduces the chance of dust piling up resulting in pristine roof tiles.



Cool and comforting house

Due to the properties of baked clay and being a main component, the tiles have a low heat transfer rate.



Light weight

The tiles are light weight less than 4 kg/sheet, yet they are high-strength and durable.



No leakage worries

With the roller kiln system, all tiles are heated evenly and thoroughly producing tiles that have equal standard size and no distortion. As a result, roofing can be done without any leakage problems.

EXCELLA CLASSIC SERIES

The exquisite curved pattern is contemporary and elegant, which makes a timeless statement and the finest finishing touches.

NEW ARRIVAL



OBSIDIAN GREY

Dimension	33x42	cm/sheet
Weight	3.5	kg/sheet
Quantity	9.8 - 10.4	sheet/m ²
Batten span	32-34	cm
Recommended pitch	17-60	degrees



BLUE CORDIER



CRYSTAL BLUE



WHITE PEARL



GREEN PERIDOT



TIMBER BROWN



RED SAPPHIRE



RED GARNET



CARNELIAN BROWN



YELLOW SAPPHIRE



GREEN JADEITE



DIAMOND GREY



MARBLE CORUNDUM



Color : Green Peridot

EXCELLA GRACE S E R I E S

The unique and luxurious design offers a refined roof tile that is universally appealing and distinctive.

NEW ARRIVAL



OBSIDIAN GREY



NAVY BLUE



BURGUNDY



EVERGREEN



SUNRISE



IONIC



BROWNISH

Dimension	34.5x42	cm/sheet
Weight	3.8	kg/sheet
Quantity	10.5	sheet/m2
Batten span	32.5-33.5	cm
Recommended pitch	25-40	degrees



Color : Ionic

EXCELLA MODERN SERIES

Eye-catching flat tiles, merged with their smoothness, result in a truly modern that reflects the admirable simplicity.

NEW ARRIVAL



OBSIDIAN GREY



COCO BROWN



COPPER BROWN



SILVER GREY



PLATINUM



SKY BLUE



OLIVE GREEN



MAROON RED



PEACH BROWN


Dimension	33.5 x 42	cm/sheet
Weight	3.8	kg/sheet
Quantity	10.5	sheet/m ²
Batten span	32-34	cm
Recommended pitch	25-40	degrees



Color : Coco Brown

SCG Roofing System

End all roof problem about heat, leaks, loose tiles with complete SCG roofing system

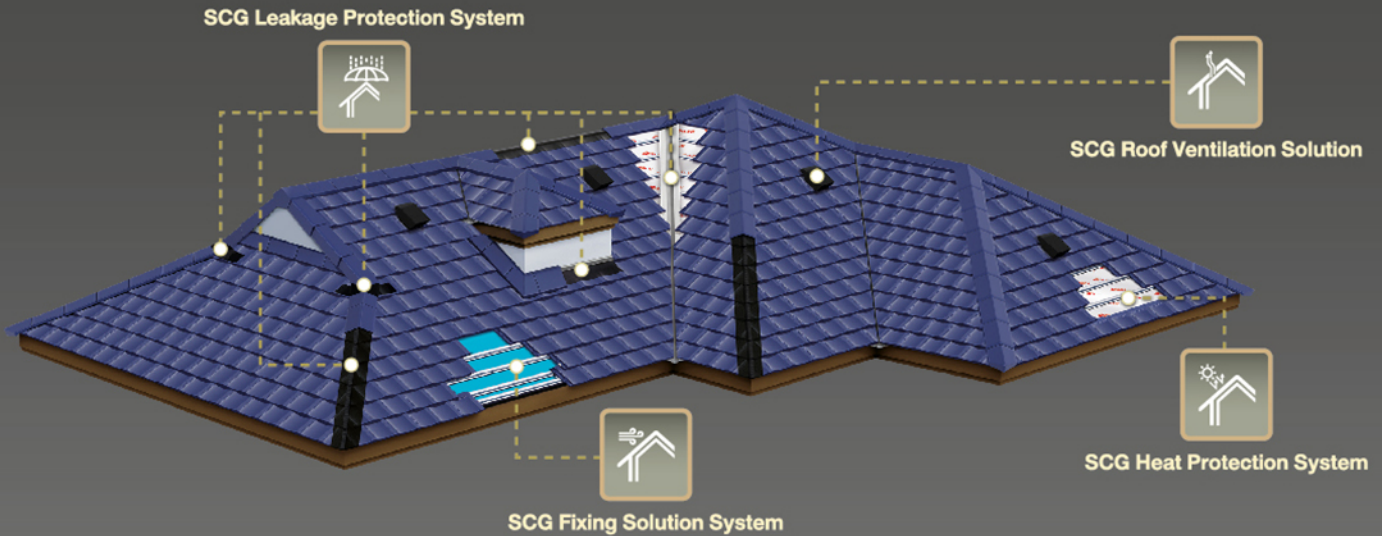

SCG Heat Protection System*

- ▶ Helps reflect heat waves from roof tiles.
- ▶ Prevents heat waves from roof entering the house.



SCG Fixing Solution System*

- ▶ Strengthens all of the roof tiles preventing them from blowing off.



SCG Leakage Protection System*

- ▶ Prevents leakages at risk points: roof tiles and joint areas.



SCG Roof Ventilation Solution **NEW**

- ▶ Roof ventilation kit was designed based on engineering principles resulting in high-powered ventilation making heat ventilation in roof ceiling more effective.
- ▶ Roof ventilation tile was designed to be compatible with each SCG roof series which are assembled at the factory, ensuring the roof is safe with no leakage.

i Safety instructions

1. Please read and follow the installation manual strictly prior to tile installation work.
2. Tile and ridge tile have been designed to be installed on a pitched roof (a roof with consistent elevation and no curved parts, i.e. gable roof, hip roof and gable-hip roof, etc.) which must have an angle of elevation according to the specification of each kind of tile as per the "installation manual" only.
3. Batten height must be linear and in the same plane. Batten plane (+/- high-low) must not exceed 1.5 mm.
4. Tile surface is slippery and steep. Do not climb the roof without a good reason. In case necessary, use only a skilled technician.
5. Do not climb roof tiles when they are wet or moist as it may cause hazards, slipping and falling.
6. Working on the roof must done with standard height safety gear and weight distribution equipment.
7. Transportation and storage of tiles should strictly be done based on the manual for product loading, transportation and storage standards, to avoid potential hazards while working.
8. Do not apply spray foam insulation under the tiles as it may later affect tile performance.
9. In case of inspection, be aware of tile fragments as they may cause injury.
10. Safety helmet should be worn at all times when inspections are taking place as tile fragments may fall and cause injury.
11. Dustproof visor should be worn at the working site as dust from tile cutting may get into eyes causing irritation.

MHB-S-R11-C003-6111

- This SCG EXCELLA ceramic roof series catalogue has been in effect since 1 October 2018 and shall supersede all previous SCG EXCEELA ceramic roof series catalogues.
- The catalogue has been constantly updated. Customers/users, designers, foremen and installers must check whether their catalogue is an updated version or not. In case uncertain or in doubt, please visit www.scgbuildingmaterials.com or contact SCG Contact Center (02-586-2222).
- Designing/using product must be done under the advice of a designer or an expert in order to determine shape and pitch of roof to not create light reflection that could affect the neighborhood.
- The condition of the product may change or have black stains caused by weather climate and environment.
- The product color in the images are for advertising. They may be different from the actual product due to the printing system. Please consider the actual color at the store before purchasing.

All Content, design, and layout are Copyright © 2018, SCG Cement-Building Materials All Rights Reserved, Reproduction in whole or part in any form or medium without specific written permission is prohibited.



Available at SCG authorized dealers and leading building material stores

SCG Contact Center 02-586-2222

Email : contact@scg.com, www.scgbuildingmaterials.com