

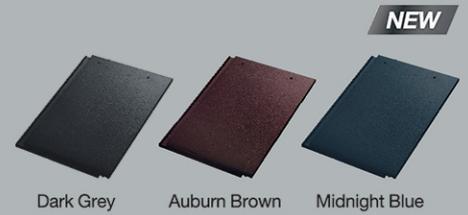



SCG Concrete Roof Prestige X-Shield

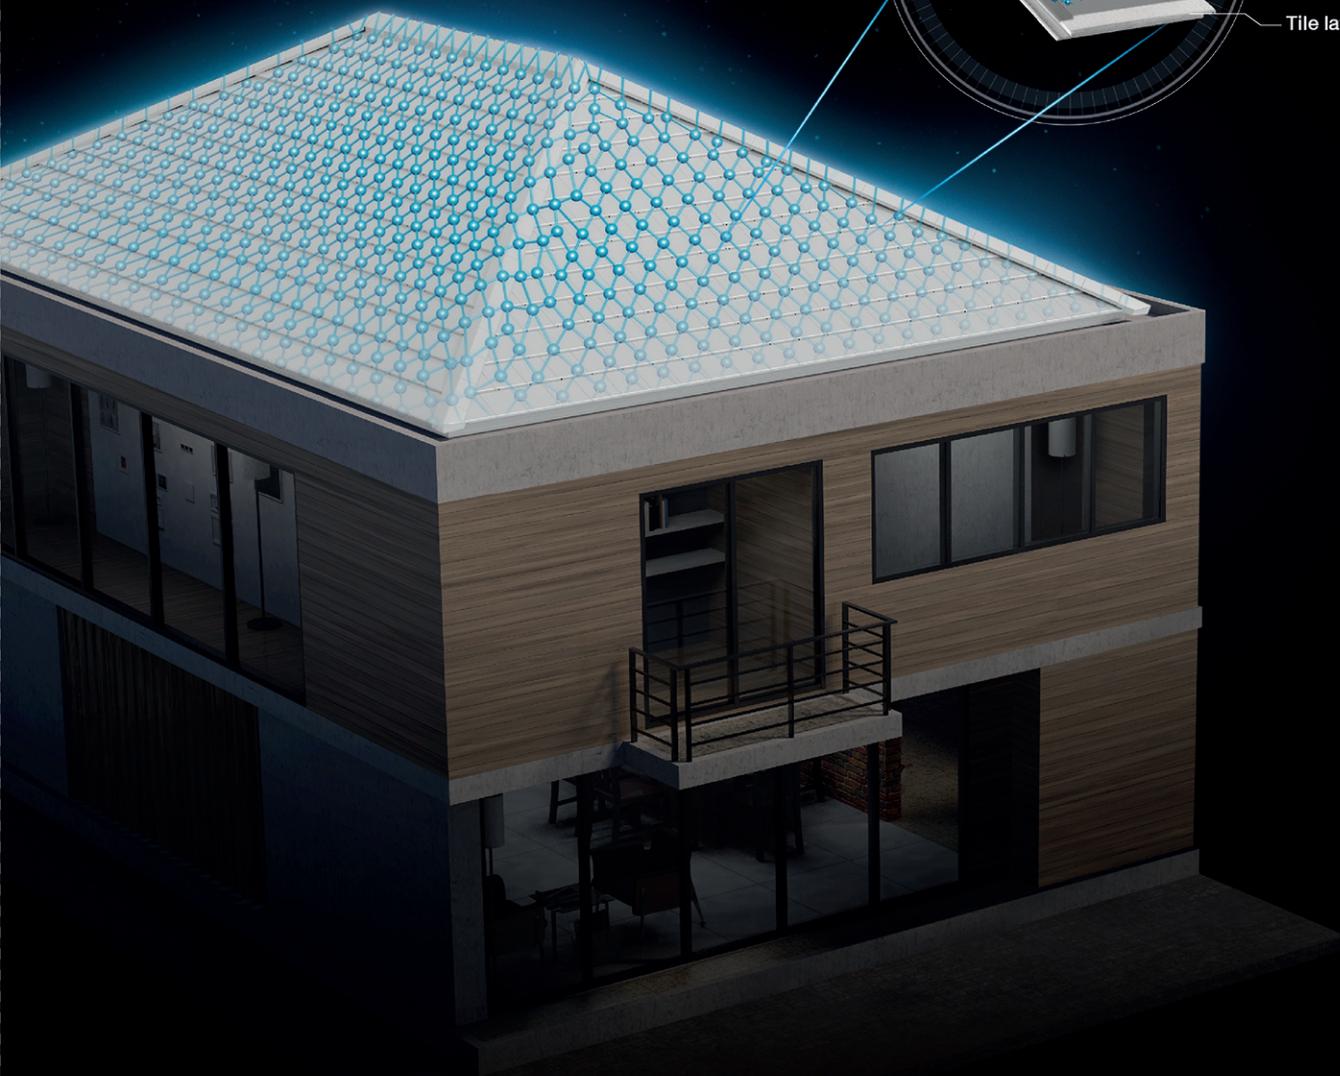

The most advanced technology on roof
for 3 times longer lasting color*

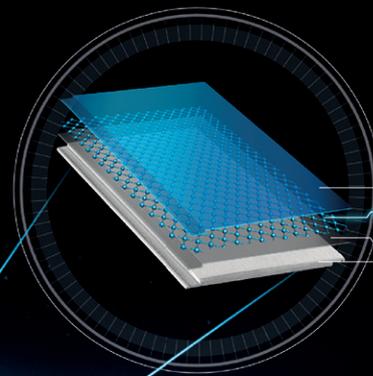


Color coating layer
X-shield molecule
 Color layer
 Tile layer

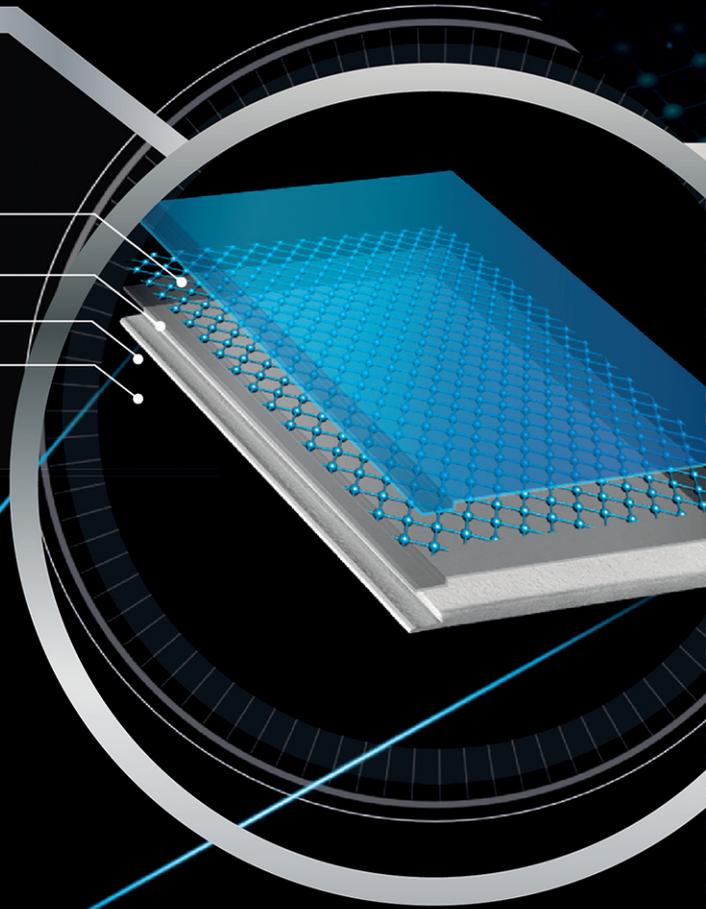

The most advanced technology on roof
 for 3 times longer lasting color*



NEW COLORS

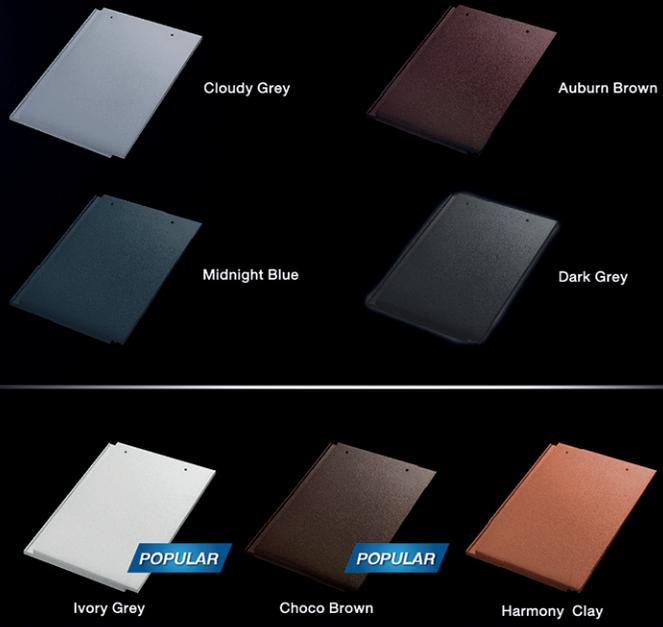

Innovative


X-Shield Technology

In SCG Prestige X-Shield Concrete Roof

X-Shield Technology the special formula color coating innovation, enhances bonding strength of color layer and coating layer and blends molecules between layers perfectly, leading to 3 times longer lasting color.*

3 times longer lasting color*
comparative test

*Tile test by Q.U.V after 5 years

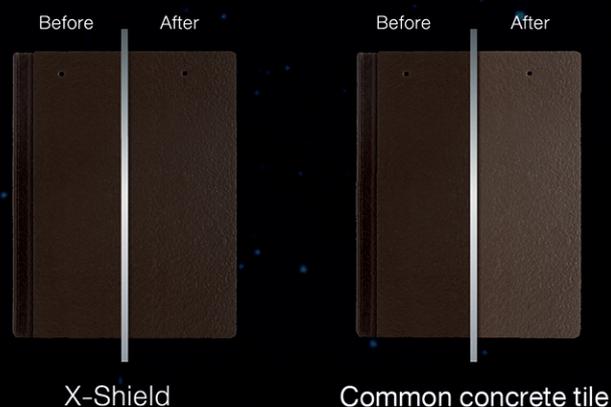

3 times longer lasting color*

Produced with advanced technology using the wet on wet color coating system and inorganic pigments to ensure a perfect blend and long lasting color for the entire life-span of the tiles



Suitable for Thailand's tropical climate

The product passed the wind-rain simulation test according to Thailand's meteorological data through the wind tunnel test in England in accordance with Wind Tunnel Procedure of British Standard BS656.



Beautiful with relaxed feeling

Reflecting the beauty of natural color to completely fulfill your relaxation time.



Specially-designed fittings

A perfect match with the tile's characteristics. Suitable for any spot that requires fittings

*Normally concrete tile color will become less durable after 5 years depending on the environment and usage. The test used Q.U.V device to accelerate weather conditions including heat and moisture which are the main factors of tile color deterioration. The results were measured by Technical Design Center, Saraburi Province.

SCG Concrete Roof Prestige X-Shield



Product specifications (approximate):

Tile size	33 x 42	cm
Minimum roof slope	25	degrees
Maximum roof slope	40	degrees
Recommended roof slope	35 - 40	degrees
Length of purlin	31 - 33	cm
Number of tiles used	10 - 11	tiles/m ²

Tile weight (approximate):

Tile weight	5.2	kg/tile
Constant weight used in roof structure design (Dead Load)	55	kg/m ²

Tile fixing standard :

At least two 2-inch screws per purlin for all tiles per rows (Fixing method is in accordance with the company's standard)

Installation :

Fittings are installed with advanced Dry Tech System and fixed with Mechanical Fixing with no mortar. The roof will have no cement stains and the fittings will not be loosened due to strong wind. This method of installation will prevent leakages and won't depend totally on a contractor's expertise.

*To install the product, please refer to the details in "SCG Prestige concrete roof and fittings installation manual". As tile color may be slightly different, which is normal for concrete tile, please make sure that you purchase an adequate number of tiles used.

MHB-S-R21-C002-6005

*The color of the product in the image may be different from the real product color due to the printing system. Please consider the real product color at the shop before purchasing.

All Content, design and layout are Copyright © 2017, SCG Cement-Building Materials All Rights Reserved, Reproduction in whole or part in any form or medium without specific written permission is prohibited



Available at SCG Authorized Dealers and leading building materials stores
SCG Contact Center 02-586-2222
Email : contact@scg.com, www.scgbuildingmaterials.com